

Honeywell

Temperature & Humidity Sensor with LCD

TABLE OF CONTENTS

INTRODUCTION	3
PRODUCT OVERVIEW	4
BEFORE YOU BEGIN	5
BATTERY INSTALLATION	7
LOW BATTERY WARNING	7
PLACEMENT OF THE REMOTE SENSOR	7
GETTING STARTED	8
TRANSMISSION COLLISION	9
PRECAUTIONS	9
SPECIFICATIONS	10
FCC STATEMENT	11
DECLARATION OF CONFORMITY	12
STANDARD WARRANTY INFORMATION	13

(TS33C)
USER MANUAL

INTRODUCTION

Thank you for selecting the Honeywell Temperature and Humidity Sensor with LCD. This device registers, displays and transmits temperature and humidity from the remote location to the designated main unit (receiver).

In this package you will find:


- One remote sensor (transmitter) TS33C
- One User Manual

Please keep this manual handy as you use your new item. It contains practical step-by-step instructions, as well as technical specifications and precautions you should know.

PRODUCT OVERVIEW

FEATURES

- Remote temperature and humidity transmission to the main unit via 433 MHz signal
- Temperature and Humidity LCD display
- Case can be wall mounted using built-in hanger
- 100 feet (30 meters) transmission range without interference
- Selection of the temperature display in Celsius or Fahrenheit
- Three available channels for temperature and humidity transmission
- Reset for all settings
- Low Battery Indication

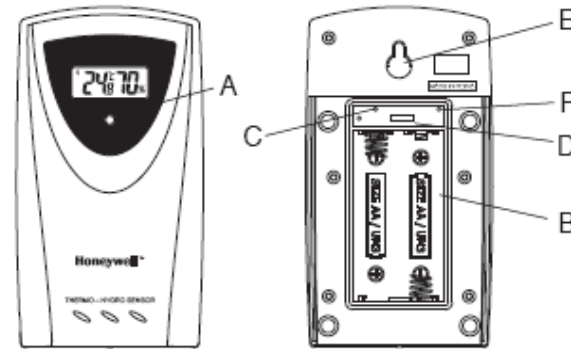

A. LED INDICATOR

- Flashes once when the remote sensor transmits a reading to the main unit.
- Flashes twice when battery power is low.

B. BATTERY COMPARTMENT

- Holds two AA-size batteries

C. RESET

- Resets all readings

D. CHANNEL SWITCH

- Selects the desired channel

E. WALL-MOUNT RECESSED HOLE

- Keeps the remote sensor on the wall

F. °C/ °F SWITCH

- Selects the temperature display in Celsius or Fahrenheit

TS33C SENSOR IS COMPATIBLE WITH ALL HONEYWELL WIRELESS WEATHER STATIONS

BEFORE YOU BEGIN

- The remote sensor can be placed indoors or outdoors.
- We recommend using alkaline batteries for the remote sensor when temperatures are above 32°F (0°C). We recommend using AA lithium batteries when temperatures are below 32°F (0°C).
- Avoid using rechargeable batteries. (Rechargeable batteries cannot maintain correct power requirements).
- Insert batteries before first use, matching the polarity in the battery compartment.
- **ALWAYS** install batteries in the remote sensor *before* the main unit.
- Press **RESET** after each battery change with a paper clip or similar tool.
- During an initial setup, place the main unit as close as possible

to the remote sensor.

- After reception is established (the remote temperature and humidity will appear on the main unit's display), position the remote sensor and the main unit within the effective transmission range of 100 feet (30 meters).

NOTE:

1. Avoid setting manually the time and date on the main unit *before the remote reading is displayed*.
2. The effective operating range may be influenced by the surrounding building materials and how the receiver (main unit) and transmitter (remote sensor) are positioned.
3. Place the remote sensor so that it faces the main unit (receiver), minimizing obstructions such as doors, walls, and furniture.
4. Though the remote sensors are weather-resistant, they should be placed away from direct sunlight, rain or snow.


NOTE: When the temperature falls below freezing, the batteries in the outdoor remote sensors may have reduced voltage supply and a shorter effective range. We recommend using lithium batteries at temperature 32°F (0°C) and below.

BATTERY INSTALLATION

NOTE: Install the batteries; select the channel and temperature in C° or F° before mounting the remote sensor.

- Remove the screws from the battery compartment with a small Phillips screwdriver.
- Set the channel. The switch is located in the battery compartment. Channel 1 is typically selected if only one remote sensor is being used.
- Install 2 “AA” size alkaline batteries (not included) matching the polarities shown in the battery compartment.
- Replace the battery compartment door and secure the screws.
- Secure remote sensor in the desired location.

LOW BATTERY WARNING

A low-battery indicator [] will appear on the remote temperature and humidity reading line of the main unit, warning that the remote sensor batteries need replacement.

PLACEMENT OF THE REMOTE SENSOR

The remote sensor can be mounted on the wall using the recessed screw hole or placed on a flat surface indoors or outdoors.

GETTING STARTED

After batteries are installed; remote sensor will transmit temperature and humidity readings at 45 second intervals.

The main unit may take up to two minutes to receive the initial readings. Upon successful reception, remote temperature and humidity will appear on the main unit’s display. The main unit will automatically update readings at 45-second intervals.

LOST COMMUNICATION

If the main unit display line for the remote sensor reading goes blank, refer to the main unit’s User Manual to find out the way to begin a new signal search. If the signal still isn’t received, please make sure that:

- The remote sensor is in its proper location.
- The distance between main unit and remote sensor is not over 100 feet (30meters).
- The path between units is clear of obstacles. Shorten the distance if necessary.
- Fresh batteries are installed correctly in both remote sensor and main unit.

If there is no reception, please perform the following steps:

- Bring the main unit and remote sensor close together.
- Remove four (4) small screws from the back of the remote sensor with small Phillips screwdriver, and open the battery compartment.
- Remove the batteries from the battery compartment and reinstall them in the same manner. Remote sensor LED indicator will flash showing transmission of the signal.

- Remove the batteries from the main unit and reinstall them in the same manner.
- The remote temperature and humidity appeared on the main unit's display will show that transmission is being received successfully.

TRANSMISSION COLLISION

Signals from the other household devices such as wireless doorbells, home security systems, and entry control, may interfere with this product or cause temporary reception interruption. This is normal and will not affect the general performance of the product. The transmission and reception of the temperature and humidity readings will resume once the interference subsides.

PRECAUTIONS

This product is engineered to give you years of satisfactory service if handled carefully. Here are a few precautions:

- Do not immerse the unit in water.
- Do not clean the unit with abrasive or corrosive materials. They may scratch the plastic parts and corrode the electronic circuits.
- Do not subject the product to excessive force, shock, dust, temperature, or humidity, which may result in malfunctions, shorter lifespan, damaged batteries, and damaged parts.
- Do not tamper with the unit's internal components. Doing so will invalidate the warranty and may cause damage. This unit contains no user-serviceable parts.
- Use only fresh batteries. Do not mix new and old batteries.
- Read the user's manual thoroughly before operating the unit.

SPECIFICATIONS

Remote Temperature

Proposed operating range with alkaline batteries:
-20.0°C to + 70.0°C/-4.0°F to + 158°F

Proposed operating range with lithium batteries:
-38.8°C to + 70.0°C/-38.0°F to +158°F

Temperature resolution: 0.1°C/0.2°F

LCD display of registered temperature and humidity

Remote Humidity

Proposed operating range: 25% to 95%

Humidity Resolution: 1%

Low battery indicator

RF Transmission Frequency: 433 MHz

Maximum number of transmission channels: three (3)

RF transmission range: Maximum 100 feet (30 meters)

Temperature transmission cycle: approximately 45 seconds

Wall Mount or Desktop option

Power

2 AA size (UM-3) 1.5V batteries (not included)

Dimensions

2.37(L) x 4(H) x 1(D) inch

FCC STATEMENT

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

Warning: Changes or modification to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment had been tested and found to comply with the limits for a Class B Digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment, installed and used in accordance with the instructions, may cause harmful interference to radio communications.

There is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to improve or correct turning the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna
- Increase the separation between the equipment and receiver.
- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio / TV technician for help.

DECLARATION OF CONFORMITY

We

Name: Hideki Electronics, Inc.

Address: 7865 SW Mohawk, Tualatin, OR 97062

Telephone No.: 1-503-612-8395

declare that the product

Product No.: TS33C

Product Name: Temperature and Humidity Sensor with LCD

Manufacturer: Hideki Electronics Ltd.

Address: Unit 2304-06, 23/F Riley House, 88 Lei Muk Road, Kwai Chung, New Territories, Hong Kong

is in conformity with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

This device may not cause harmful interference.

This device must accept any interference received, including interference that may cause undesired operation.

The information above is not to be used as a contact for support or sales. Please call our customer service hotline (refer to the Standard Warranty Information) for all injuries instead.

STANDARD WARRANTY INFORMATION

This product is warranted from manufacturing defects for one year from date of retail purchase. It does not cover damages or wear resulting from accident, misuse, abuse, commercial use, or unauthorized adjustment and repair.

Note that online product registration is required to ensure valid warranty protection.

To register your product, go to our Company website at:

www.honeywellweatherstations.com. Click Online Product Registration under the Customer Service menu.

Should you require assistance with this product and its operation, please contact our Customer Service Hotline 1(866) 443 3543.

Please direct all returns to the place of the original purchase. Should this not be possible, contact Hideki Customer Service Hotline for assistance and to obtain a Return Merchandise Authorization (RMA).

Returns without a return authorization will be refused. Please retain your original receipt as you may be asked to provide a copy for proof of purchase.

Hideki Electronics, Inc. reserves the right to repair or replace the product at our option.

Copyright (2005) Hideki Electronics Inc. All Rights Reserved. The Honeywell Trademark is used under license from Honeywell Intellectual Properties Inc.

Honeywell International Inc. makes no representations or warranties with respect to this product.